




DIMENSIONS / 尺寸

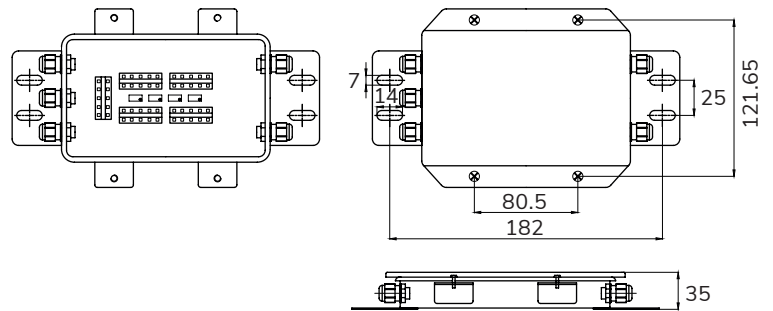


FEATURES & APPLICATIONS / 特点和用途

- Utilize One Display With Multiple Sensors Where The Output Resultant Or Summing Is Required
- Strong And Durable. Good Anti-Interference
- Used High Stability Of The Imported Multiturn Potentiometer
- Suitable For Working In Harsh Environment

- 连接多个传感器和一个仪表, 信号集成
- 坚固耐用, 抗干扰性好
- 采用高稳定性的进口多圈电位器
- 适用于环境恶劣的工作场所

SPECIFICATIONS / 详细描述

PERFORMANCE	产品性能	TECHNIQUE / 技术指标
Electrical	电气特性	350 ~ 1000 Ω
Channel	通道	4
Bridge Resistance	桥路阻抗	350 ~ 1000 Ω
ERROR	误差	
Span Adjustment	间距调整	0 ~ 31% Of RO
SET-UP	配置	
Power Supply	电源	14 ~ 26 VDC
MECHANICAL	机械特性	
Weight	重量	0.7Kg
Material	材料	Stainless Steel / 不锈钢
IP Rating	IP等级	IP68
Temperature	温度	
Operation Temp. Range	操作温度	0 ~ 70°C
Storage Temperature	储存温度	-40 ~ 85°C
Relative Humidity	相对湿度	95% RH (Non Condensing)

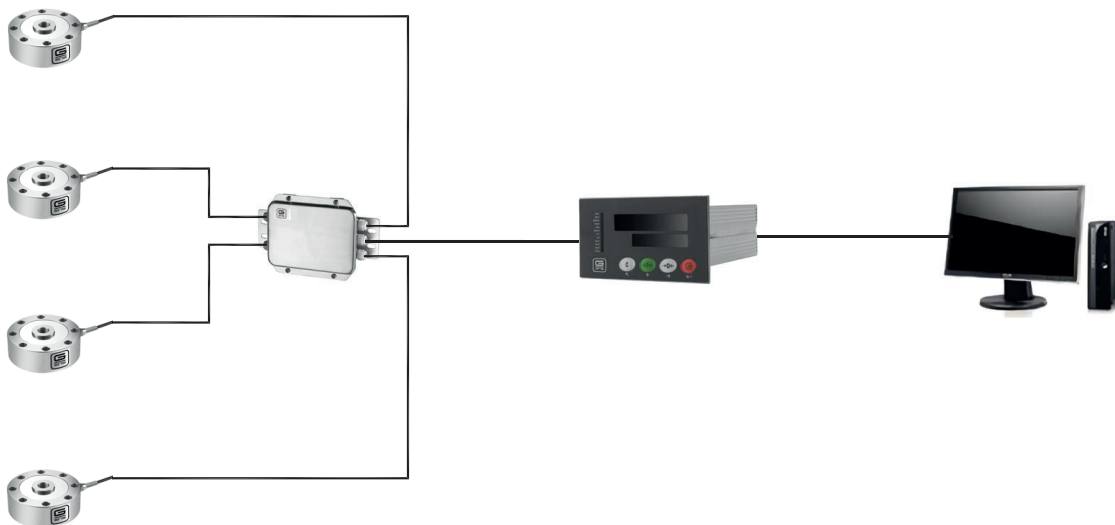

Sample of typical setup